

Control system KOMFOVENT C5

Fully integrated control system Komfovent ensures safe operation of the air handling unit, controls preset ventilation system parameters and optimizes unit's operating costs.



Detailed information for the user

- Air flow indication in (m³/h, m³/s, l/s).
- Thermal efficiency of the heat exchanger (%).
- Heat exchanger recovered energy (kW).
- Thermal energy saving indicator (%).
- Operation time counters of fans (h).
- Heater energy consumption counter (kWh).
- Heat exchanger recovered energy counter (kWh).

Various operating modes

- 5 different operation modes: *Comfort1*, *Comfort2*, *Economy1*, *Economy2* and *Special*. User may set supply and extract air volumes as well as air temperature for each of mode separately.
- Temperature control modes: Supply air / Extract air / Room. Possibility to select which temperature to be maintained.
- Flow control modes: Constant Air Volume (CAV), Variable Air Volume (VAV), Direct controlled volume (DCV).
- Universal operating schedule with up to 20 events, for which of them user can assign weekday(s) and one of five operation modes.
- Holiday scheduling allows the user to change operation mode or switch off the air handling unit at some dates of the year. Up to 10 events are possible.

Extended control possibilities

- Controlling up to 30 units connected into a network from one panel.
- Ability to connect the controller to the Internet network and manage it via a standard internet browser without any accessories.
- Ability to control the unit not only by a control panel or a computer, but also by different external devices (switch, timer, etc.) and systems (e.g. the smart house system).
- Possibility to control air handling unit by Smartphone.



Android



iOS

Connectivity & Protocols

- Modbus RTU over RS-485
- Modbus TCP over Ethernet
- BACnet/IP over Ethernet

C3 control system features are available on www.komfovent.com/resources.




Komfovent VERSO added values

VERSO units are user-friendly and intended for convenient exploitation and efficient operation.


Easy selection

Equipment is selected using an informative and useful software, available to be downloaded to your PC from our website: www.komfovent.com/software. Technical data sheets present important technical parameters at a specified working point of the selected unit: efficiency, SFP, acoustics and other required data.

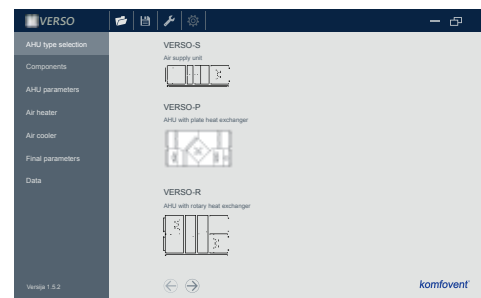

Integrated web server

VERSO air handling unit operation maybe monitored and controlled via web browser. Implemented Modbus and BACnet protocols allow easy integration of air handling units to any desired Building Management Systems.

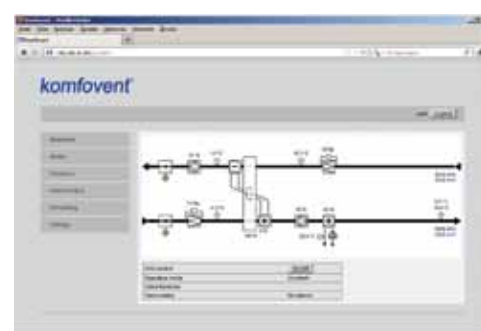

Unit's operation analysis

The computer program "Komfovent LogPlotter" has been designed to analyze the unit's operation history of the last 7 days. Unit's operation with C5 can be monitored not only in real-time from now on. The program can be downloaded from www.komfovent.com/software.



Non residential ventilation units **VERSO**



Verso R units with rotary heat exchanger



Verso RHP units with rotary heat exchanger and heat pump



Verso P units with plate heat exchanger



Verso CF units with counterflow plate heat exchanger



Verso S supply air units

Komfovent VERSO

VERSO series units are divided into two groups: VERSO 1 000–7 000 that is a standardized range of AHUs and VERSO 10–90 units that are designed for the special projects. Both groups of the units can be offered with a heat recovery, an integrated heat pump or just ordinary air supply units.



Capacity range from 1000 to 34 000 m³/h

Features and benefits of VERSO units:

- All units are completely prewired and have an integrated automatic control.
- Innovative units with integrated reversible heating/cooling pump.
- Wide choice of control functions is already included as a standard feature.
- Extremely silent in operation.
- Low energy consumption.
- Energy efficiency tested and approved by EUROVENT.
- Fans are balanced statically and dynamically to avoid vibration and ensure silent operation.
- All casings are powder painted.
- Steady baseframe with onsite regulation possibilities.
- Easy and quick assembling onsite.
- Integrated web server for clever control.
- Control via Smartphone available.

All standardized VERSO 1000–7000 units are based on the principle of Plug & Play: each unit has the integrated control system and is delivered with a complete automatic control installed and prewired inside the unit. VERSO 1 000–7 000 units can be fast delivered as they are available on stock. The airflow ranges from 1 000 to 7 000 m³/h. VERSO 10–90 units have more wide and project oriented possibilities which customer can select using the selection software.



VERSO air handling units. Specifications

[PRELIMINARY DATA]

UNIT SIZE	1200		1300				1400	1500			1600		1700	2000			2100	2300	2500	3000			3500	4000		4500	7000	UNIT SIZE
AHU type	Verso R	Verso R	Verso RHP	Verso CF	Verso CF	Verso S	Verso R	Verso RHP	Verso CF	Verso R	Verso P	Verso CF	Verso R	Verso R	Verso P	Verso S	Verso CF	Verso R	Verso R	Verso S	Verso CF	Verso R	Verso S	Verso R	Verso S	Verso R	Verso R	AHU type
Heat exchanger type	rotary	rotary	rotary & heat pump	counter cross-flow	counter cross-flow	supply air unit	rotary	rotary & heat pump	counter cross-flow	rotary	plate	counter cross-flow	rotary	rotary	plate	supply air unit	counter cross-flow	rotary	rotary	supply air unit	counter cross-flow	rotary	supply air unit	rotary	rotary	rotary	rotary	Heat exchanger type
AHU version	universal	flat	universal	universal	flat	flat	universal	universal	flat	universal	flat	universal	universal	flat	flat	flat	universal	universal	universal	flat	universal	universal	flat	universal	horizontal	horizontal	AHU version	
Nominal air flow	m ³ /h	1300	1200	1300	1300	1300	1200	1500	1500	1500	1800	1700	1700	1900	2000	2000	2000	2300	2400	3600	3000	3500	3900	4000	4500	8000	m ³ /h	
Efficiency of heat exchanger	%	85	87	84	84	85	–	85	84	84	84	73	82	84	84	73	–	85	84	84	–	89	83	–	83	86	Efficiency of heat exchanger	
Dimensions	B, mm	905	1050	850	910	1100	700	905	905	1100	910	1350	910	910	1210	1350	1000	910	910	1150	1015	1150	1150	1015	1150	1500	B, mm	
	H, mm	905	480	905	905	527	350	905	905	527	1000	528	905	1000	526	528	350	905	1000	1150	545	1150	1150	545	1150	1520	H, mm	
	L, mm	1355	1360	1505	1810	1650	893	1355	1505	1650	1485	1560	1810	1485	2060	1560	893	2000	1485	650/700/750	1160	750/1000/750	650/700/750	1160	650/700/750	750/390/750	L, mm	
Unit weight	kg	195	135	260	220	161	46	195	260	163	270	190	220	285	280	190	75	250	285	450 (140/160/150)	120	140/200/140	460 (145/160/155)	125	470 (150/160/160)	780 (270/230/280)	kg	
Duct connections	mm	∅ 315 (4x)	∅ 315 (4x)	∅ 250 (4x)	∅ 315 (4x)	∅ 315 (4x)	∅ 250 (2x)	∅ 315 (4x)	∅ 250 (4x)	∅ 315 (4x)	300x400 (4x)	∅ 315 (4x)	∅ 315 (4x)	300x400 (4x)	∅ 355 (4x)	∅ 315 (4x)	700x250 (2x)	300x400 (4x)	300x400 (4x)	400x500 (4x)	600x400 (2x)	400x500 (4x)	400x500 (4x)	600x400 (2x)	400x500 (4x)	1200x600 (4x)	mm	
Max. operating current with electric air heater	A	12,8	10,6	8,7	10,3	10,3	23,5	12,9	8,7	12,7	12,9	14,1	12,3	15	16,9	16,3	35,2	16,6	16,8	16,5	–	–	25,5	–	27,3	–	A	
Max. operating current with water air heater	A	6,3	6,3	–	3,8	3,8	1,9	6,4	–	6,2	6,4	6,3	5,8	4,1	6	7	2,8	5,9	6	3,5	1,7	3,7	4,2	1,8	5,5	9,9	A	
Supply voltage	V/Hz	HE 3~400 HW 1~230	HE 3~400 HW 1~230	3~400	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	3~400	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	HE 3~400 HW 1~230	3~400	3~400	3~400	3~400	3~400	3~400	3~400	V/Hz	
Fans type		EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	EC	
Electric power input of the fan drive at maximum flow rate	W	470	470	273	273	273	275	470	470	470	470	470	470	515	660	660	2x170	660	660	990	990	895	1000	1000	1700	2730	W	
Heater type: E – electric, W – water or HCW – changeover coils		E/HCW	E/W	E	E/HCW	E/W	E/W	E/HCW	E	E/W	E/HCW	E/W	E/HCW	E/HCW	E/W	E/W	E/W	E/HCW	E/HCW	E/HCW	W	HCW	E/HCW	W	E/HCW	W		
Maximal electric heater capacity	kW	4,5	3	2	4,5	4,5	15	4,5	2	4,5	4,5	7,5	4,5	7,5	7,5	9	22,5	7,5	7,5	9	–	–	15	–	15	–	kW	
Control panel type		C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C3 / 3.1	C5.1	C5.1	C5.1	C3 / 3.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1	C5.1		

- Thermal insulation thickness – 50 mm.
- Standard filter class (supply/exhaust) – M5, F7 class air filters – on request.

